


Bandsplitters 200 GHz Channel Spacing

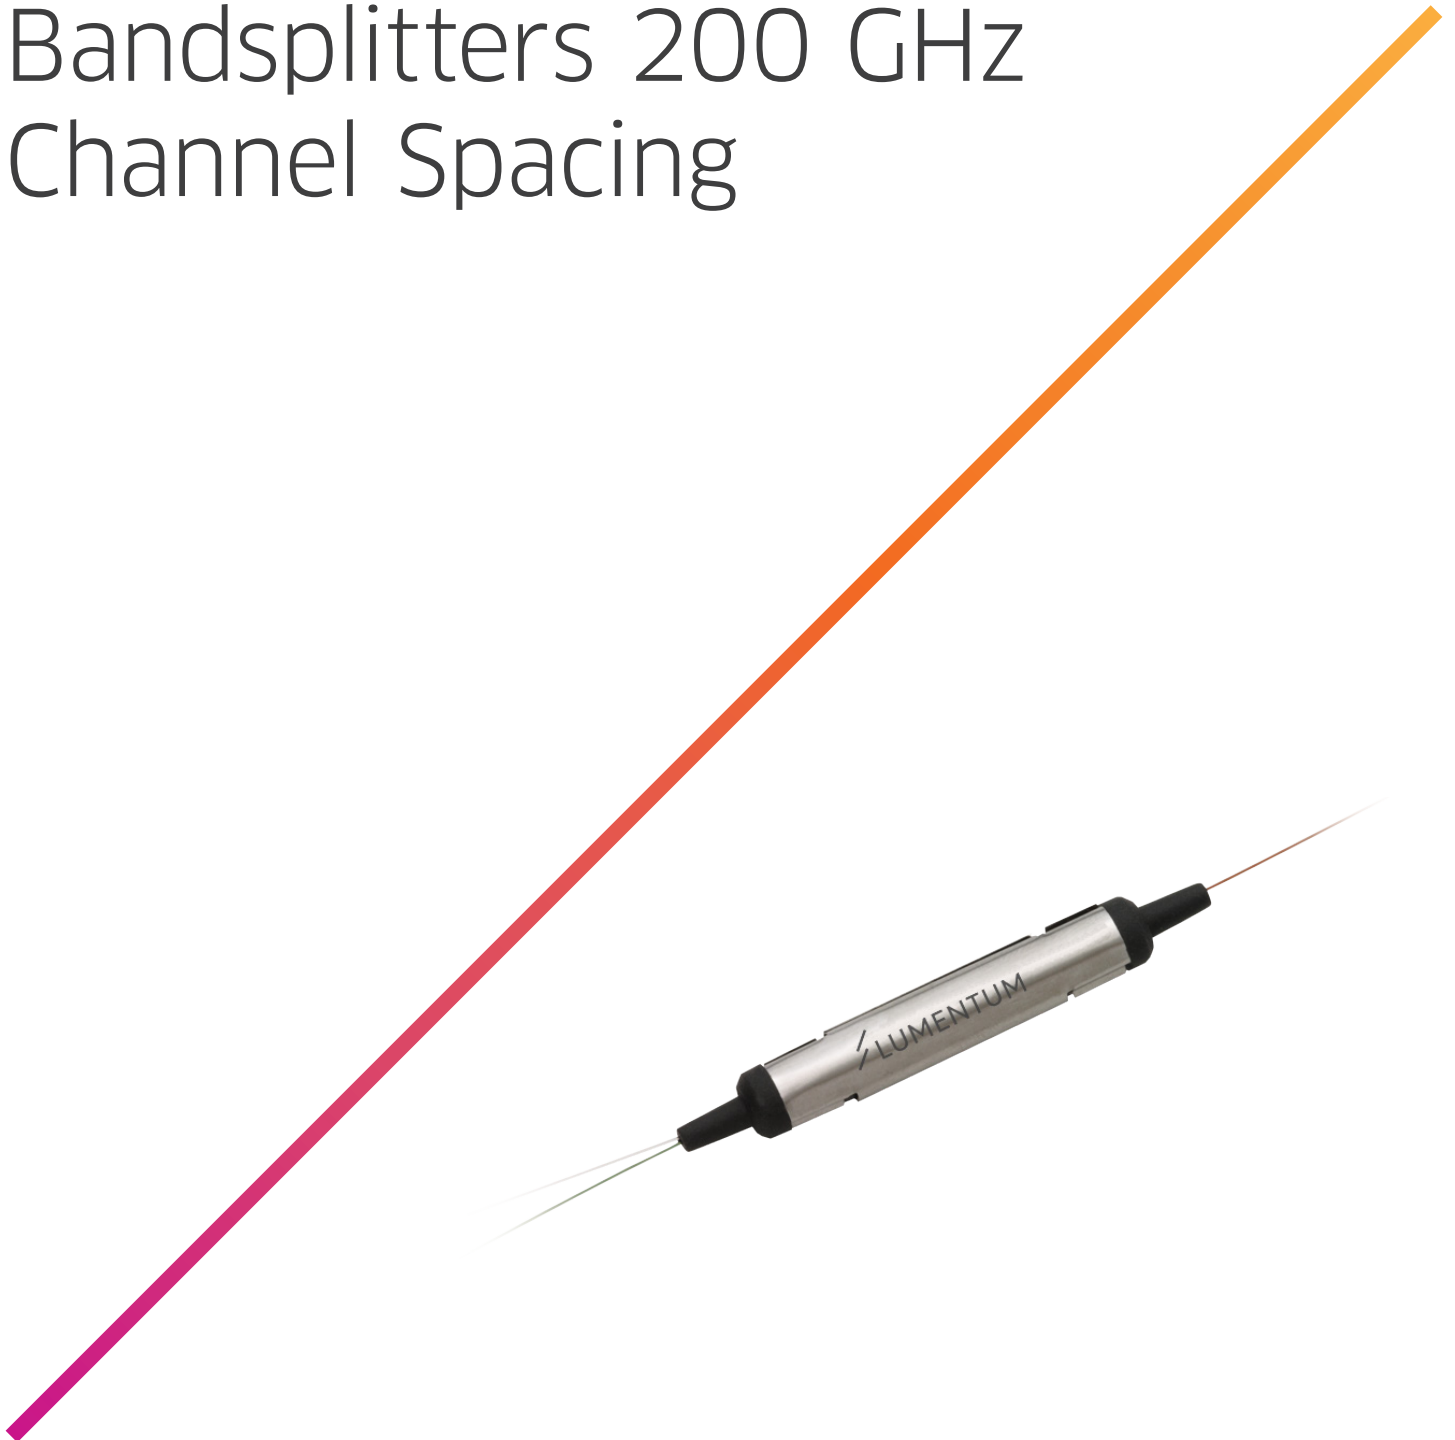

Lumentum ITU bandsplitters are the result of years of telecommunications experience in interference filter technology. Manufactured using laser welding technology, they conveniently split ITU channel spacings of 200, 100 and 50 GHz into manageable channel bands.

These highly reliable components demonstrate low loss, temperature insensitivity, and reliable performance in any system application. They are designed to exceed the requirements of Telcordia GR-1221.

Used within mux/demux and add/drop applications, Lumentum bandsplitters manage multiple ITU channels. Narrow transitions from the passed band to the block band minimize lost channels while maintaining high spectral efficiency. Integrated with other available technologies, such as ITU channel filters, fiber Bragg gratings, and arrayed waveguides, Lumentum bandsplitters offer complete dense wavelength division multiplexing (DWDM) solutions.

Established volume capability and proven experience in customizing fiber optic components and modules make Lumentum the supplier of choice for these and other DWDM products.

Key Features


- Low insertion loss
- Flat and wide passband
- High isolation
- Low chromatic dispersion

Applications

- Long haul networks
- Metro networks
- Ring architectures
- Add/drop sites

Compliance

- Telcordia GR-1221

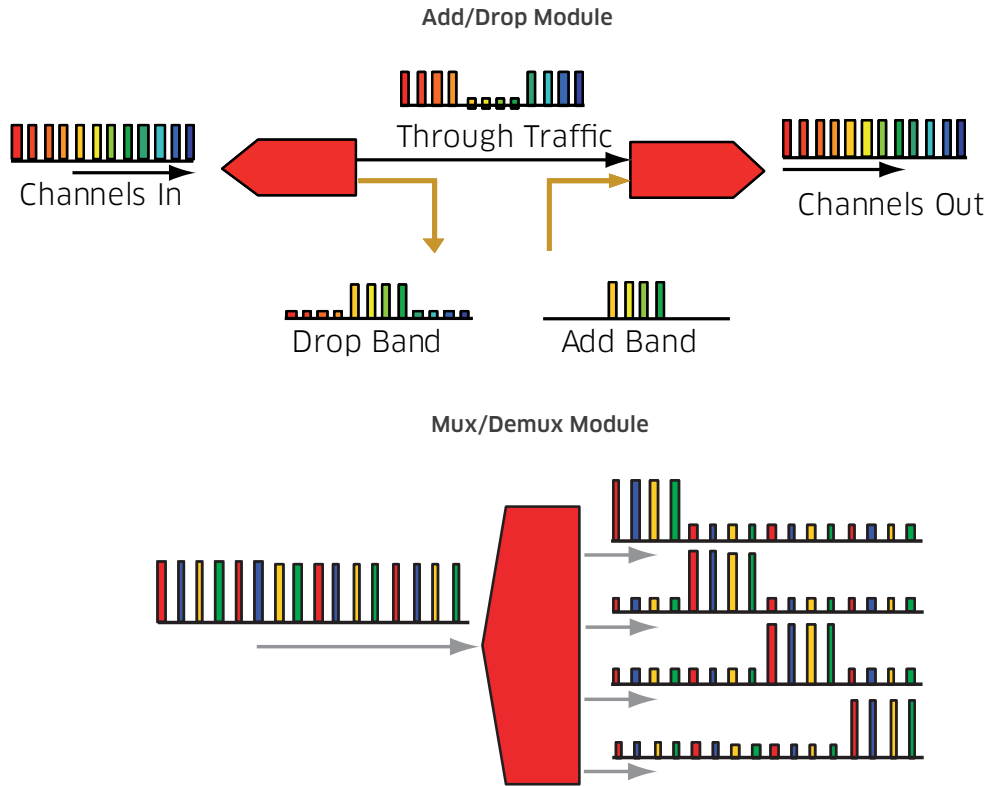

Specifications

Parameter		4 Skip 0	4 Skip 1	5 Skip 1	10 Skip 2
Passband width	Minimum	±335 GHz	±387.5 GHz	±487.5 GHz	±987.5 GHz
Passband ripple	Maximum	0.5 dB	0.25 dB	0.35 dB	0.2 dB
Insertion loss (transmission)	Maximum	1.0 dB	0.8 dB	1.0 dB	1.0 dB
Insertion loss (reflection)	Maximum	0.6 dB	0.4 dB	0.5 dB	0.6 dB
Isolation (adjacent band)	Minimum	20 dB	20 dB	37 dB	25 dB
Isolation (reflection)	Minimum	12 dB	15 dB	12 dB	15 dB
Directivity	Minimum	50 dB	50 dB	50 dB	50 dB
Return loss	Minimum	45 dB	45 dB	45 dB	45 dB
Polarization dependent loss	Maximum	0.15 dB	0.1 dB	0.15 dB	0.15 dB
Polarization mode dispersion	Maximum	0.15 ps	0.1 ps	0.2 ps	0.15 ps
Chromatic dispersion (Tx)	Maximum	±10 ps/nm	±5 ps/nm	±20 ps/nm	±3 ps/nm
Chromatic dispersion (Rx)	Maximum	±5 ps/nm	±5 ps/nm	±20 ps/nm	±2 ps/nm
Operating temperature		0 to 70°C			
Storage temperature		-40 to 85°C			
Fiber type		SMF-28 with 250 μm			
Fiber length		1.5±0.1 m			
Package dimensions (Ø x L)		5.5 x 35.4 mm			

Ordering Information

For more information on this or other products and their availability, please contact your local Lumentum account manager or Lumentum directly at customer.service@lumentum.com.

DWBW 

Code	Model
2	2 port device
3	3 port device

F 

Code	Number of Channels Passed/Skipped
4S0	4 Skip 0
4S1	4 Skip 1
5S1	5 Skip 1
TS3	10 Skip 2

2 

Code	Center Channel Frequency
Standard grids available. Please contact Lumentum to determine what is available for the type of filter required.	

SMF-28 is a registered trademark of Corning Incorporated.
Telcordia is a registered trademark of Telcordia Technologies Incorporated.



North America
Toll Free: 844 810 LITE (5483)

Outside North America
Toll Free: 800 000 LITE (5483)

China
Toll Free: 400 120 LITE (5483)

© 2015 Lumentum Operations LLC
Product specifications and descriptions in this document are subject to change without notice.