


# 2 x 800 mW Fiber Bragg Grating Stabilized 980 nm Pump Modules

D2 Series

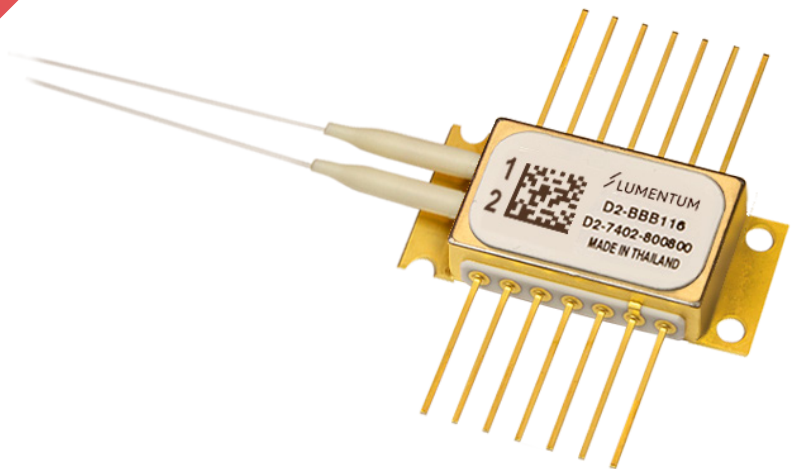

The Lumentum D2 Series is dual-chip 980 nm pump module with each emitter independently controlled. It uses a number of revolutionary design steps to provide high optical power density within a compact space. The D2 Series pump module incorporates the Lumentum high-reliability, high-efficiency 980 nm laser diode in a cooled fiber Bragg grating-stabilized 14-pin low-profile butterfly design. The module meets the stringent requirements of the telecommunications industry, including Telcordia GR-468-CORE for hermetic 980 nm pump modules.

The D2 pump module, which uses fiber Bragg grating stabilization to lock the emission wavelength, provides a noise-free, narrowband spectrum, even under changes in temperature, drive current, and optical feedback. Wavelength selection is available for applications requiring the highest performance in spectrum control with the highest power.

#### **Key Features**

- Operating power range from 800 – 1600 mW
- 45°C internal temperature
- Low-profile 5.2 mm 14-PIN butterfly package
- Fiber Bragg grating stabilization
- Wavelength selection available
- Integrated thermoelectric cooler, thermistor, and monitor diode
- High dynamic range
- Excellent low-power stability

#### **Applications**

- Dense wavelength division multiplexing (DWDM) EDFAs
- High bit-rate, high channel-count EDFAs
- CATV distribution



#### **Compliance**

- Telcordia GR-468-CORE


Dimensions Diagram and Pin Assignment

Package dimensions:

- Length (including boot and excluding pins): 40.1 mm
- Width: 40.5 mm (including uncut lead)
- Height: 5.2 mm

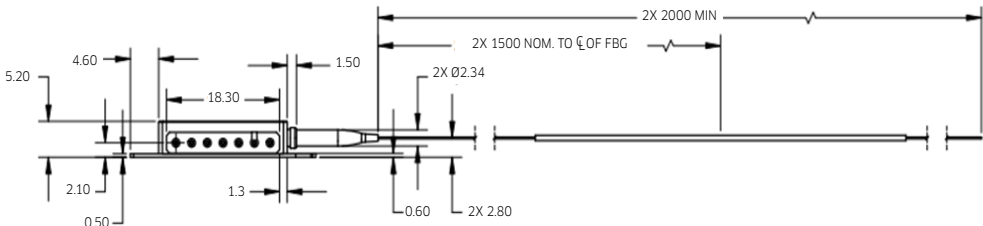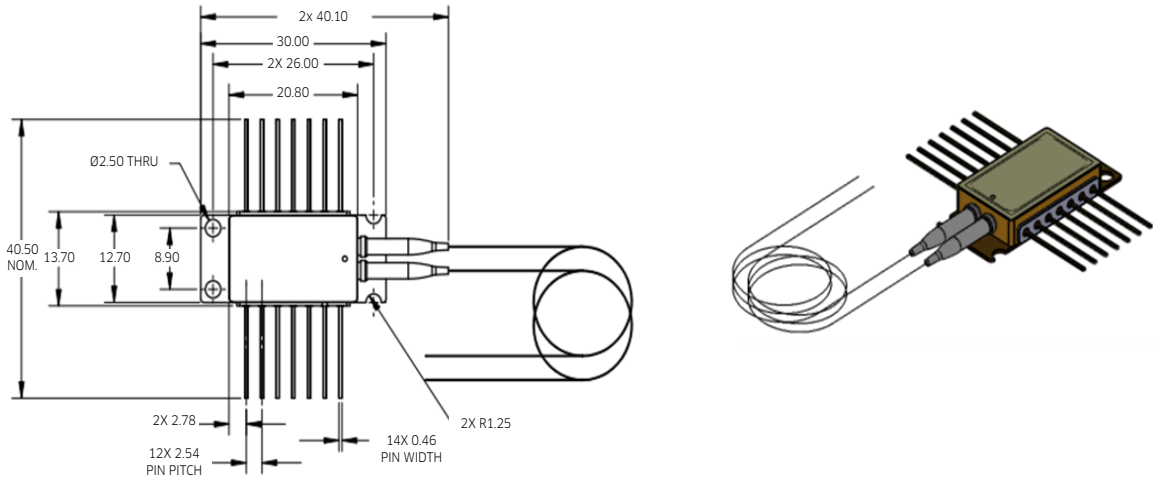

Pin	Description
1	TEC+
2	Thermistor
3	MPD Anode(+)
4	MPD Cathode(-)
5	Thermistor
6	LD2 Cathode(-)
7	LD2 Anode(+)
8	Not Connected
9	Not Connected
10	LD1 Anode(+)
11	LD1 Cathode(-)
12	Not Connected
13	Case ground
14	TEC-

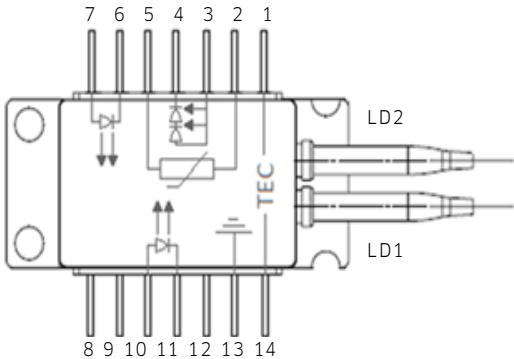

**Table 1 Absolute Maximum Ratings**

Parameter	Symbol	Test Condition	Value		Unit
			Minimum	Maximum	
Operating case temperature	$T_{op}$	—	-5	+75	°C
Storage temperature	$T_{stg}$	2000 hrs	-40	+85	°C
Laser operating temperature	$T_{LD}$	—	15	60	°C
LD reverse voltage	$V_f$	—	—	2	V
D2 LD forward current	$I_{f,max}$	Unlimited time	—	1800	mA
D2 LD current transient	—	20 $\mu$ s maximum	—	1900	mA
LD Reverse current	—	—	—	10	$\mu$ A
PD reverse voltage	$V_{PD}$	—	—	20	V
PD forward current	$I_{PF}$	—	—	10	mA
LD electrostatic discharge (ESD)	$V_{ESD}$	C = 100 pF, R = 1.5 k $\Omega$ , HBM	—	1000	V
PD electrostatic discharge (ESD)	$V_{ESD}$	C = 100 pF, R = 1.5 k $\Omega$ , HBM	—	500	V
TEC forward current	$I_c$	—	—	4	A
TEC reverse current	$I_{rc}$	—	-2.2	—	A
TEC voltage	$V_c$	—	—	4.5	V
Axial pull force	—	3X 10 s	—	5	N
Side pull force	—	3X 10 s	—	2.5	N
Fiber bend radius	—	—	16	—	mm
Atmospheric pressure	—	Storage	11	—	kPa
Atmospheric pressure	—	Operating	58	—	kPa
Relative humidity	RH	Non-condensing	5	95	%
Lead soldering time	—	300°C	—	10	s

Absolute maximum ratings are the maximum stresses that may be applied to the module for short periods of time without causing damage. Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for extended periods of time or exposure to more than one absolute maximum rating simultaneously may adversely affect device reliability. Specifications may not necessarily be met under these conditions.

**Table 2 Optical and Electrical Characteristics of D2 Pump (Case temperature  $T_{case} = 0^\circ\text{C}$  to  $75^\circ\text{C}$ ) for different Pop**

Product Code	Maximum Operating Power (mW)	Maximum Operating Current (mA)	Minimum Kink-Free Power (mW)	Maximum Kink-Free Current (mA)
D2-xxxx-400400	400	770	440	840
D2-xxxx-500500	500	945	550	1035
D2-xxxx-600600	600	1130	660	1240
D2-xxxx-700700	700	1315	770	1460
D2-xxxx-800800	800	1525	880	1725

Note: xxxx denotes wavelength and tolerance per Table 3 below.

**Table 3 Available Peak Wavelength Selection**

Product Code	Minimum Peak Wavelength	Maximum Peak Wavelength
D2-7402-xxxxxx	973 nm	975 nm
D2-7602-xxxxxx	975 nm	977 nm
D2-8000-xxxxxx	973 nm	981.5 nm

Note: xxxxxx denotes operating power per Table 2 above.

**Table 4 Optical and Electrical Performance (BOL,  $T_{case} = -5^{\circ}\text{C}$  to  $75^{\circ}\text{C}$ ,  $P_f$  range = 30 mW to  $P_{max}$ , -50 dB reflection, unless otherwise noted)**

Parameter	Symbol	Test Condition	Limits		Unit
			Minimum	Maximum	
Threshold current per port	$I_{th}$ -BOL	—	—	100	mA
Operating forward current	$I_{op}$	—	—	Table 2	mA
Forward voltage	$V_f$	—	$V_{min}$	2.2	V
Fiber output power range	$P_f$	—	30 mW	$P_{max}$ per Table 2	mW
Kink-free output power	$P_{max}$	If = $I_{max}$ , Table 2	$P_{max}$ per Table 2	—	mW
Center emission wavelength	$\lambda_m$	Over $P_f$ range,	See Table 3		nm
Power in pump band	$P_{pump}$	Pump band = $\lambda_m \pm 1.5$ nm, 60 mW < Pop < $P_{max}$	90	—	%
Power in pump band	$P_{pump}$	Pump band = $\lambda_m \pm 1.5$ nm, 30 < Pop < 60 mW	80	—	%
Spectral width	$\Delta\lambda_{RMS}$	CW, over $P_f$ range,	—	2.0	nm
Wavelength tuning vs. temperature	$\Delta\lambda/T$	$I_f = I_{op}$	0	0.01	nm/ $^{\circ}\text{C}$
Laser diode 10%-90% rise/fall time	$t_r/t_f$	Step response	—	100	ns
Return loss	RL	1480 – 1620 nm	—	9	dB
Optical power cross talk	—	Over $P_f$ and $T_{case}$ range	—	1.0	mW
Thermal cross talk	—	Over $P_f$ and $T_{case}$ range	—	1.0	$^{\circ}\text{C}$
Monitor diode response per LD	$I_{BF}$	Over $P_{op}$ range	0.5	5	$\mu\text{A}/\text{mW}$
Monitor diode rise/fall time	$t_{PDR/1PDF}$	5V reverse bias, 10%-90%, 50 $\Omega$ load	—	100	ns
Monitor diode capacitance	$C_t$	5V reverse bias, f=1MHz	—	10	pF
LD operating temperature	$T_{LD}$	45 $^{\circ}\text{C}$ , nominal	43	47	$^{\circ}\text{C}$
Thermistor resistance	$R_{th}$	$T_{set} = 45^{\circ}\text{C}$	9.5	10.5	k $\Omega$
TEC current	TECI	$T_{case} -5$ to $75^{\circ}\text{C}$	—	2.41	A
TEC voltage	TECV	$T_{case} -5$ to $75^{\circ}\text{C}$	—	2.62	V

**Table 5 Total Module Power Consumption at  $T_{LD} = 45^{\circ}\text{C}$  (BOL/EOL,  $T_{case} = -5$  to  $75^{\circ}\text{C}$ )**

Product Code	Total Module Power Consumption $P_{max}$ (W) BOL/EOL
D2-xxxx-400400	5.8/6.0 (Typical 5.1/5.3)
D2-xxxx-500500	6.2/6.4 (Typical 5.5/5.7)
D2-xxxx-600600	6.7/7.4 (Typical 5.9/6.2)
D2-xxxx-700700	7.9/8.8 (Typical 6.4/6.8)
D2-xxxx-800800	9.3/10.8 (Typical 7.1/7.9)


**Table 6 HI 1060 Fiber Nominal Characteristics and Tolerances**

Parameters	Specification
Cutoff wavelength	920 nm
Maximum attenuation at 980 nm	2.1 dB/km
Cladding outside diameter	125 $\pm$ 1 $\mu\text{m}$
Coating outside diameter	245 $\pm$ 10 $\mu\text{m}$
Core-cladding concentricity	$\leq$ 0.5 $\mu\text{m}$
Mode field diameter	5.9 $\pm$ 0.5 $\mu\text{m}$

**Fiber Marking**


Higher power port has 2~4 black markings 2~3 cm in length at 25 cm distance

- Fiber markings are located after grating
- There is no fiber marking between package and grating
- If both ports have the same output power, LD2 port will be marked black.

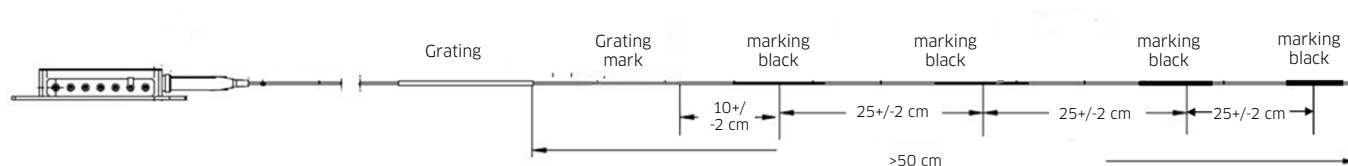

## Package Label

LD1 and LD2 ports are marked as shown.

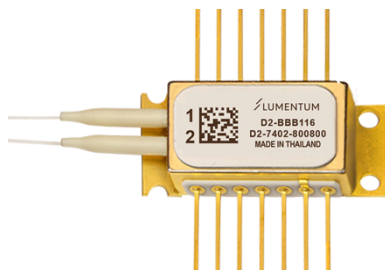

## User Safety

### Safety and Operating Considerations

The laser light emitted from this laser diode is invisible and may be harmful to the human eye. Avoid looking directly into the fiber when the device is in operation.

**CAUTION: THE USE OF OPTICAL INSTRUMENTS WITH THIS PRODUCT INCREASES EYE HAZARD.**

Operating the laser diode outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with this component cannot exceed maximum peak optical power.

CW laser diodes may be damaged by excessive drive current or switching transients. When using power supplies, the laser diode should be connected with the main power on and the output Voltage at zero. The current should be increased slowly while monitoring the laser diode output power and the drive current. Careful attention to heat sinking and proper mounting of this device is required to ensure specified performance over its operating life.

ESD PROTECTION—Electrostatic discharge (ESD) is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous antistatic techniques when handling laser diodes

## Laser Safety

The Lumentum pump laser module emits hazardous invisible laser radiation.

Due to the small size of the pump module, the box packaging is labeled with the laser radiation hazard symbol and safety warning label shown below.

This component requires provisions of drive and control electronics before emitting laser radiation.

Laser classification depends on the system control circuit and laser safety features provided.

This diode-pumped laser module is not 21CFR 1040.10 or IEC 60825-1:2014 certified. It is a component intended for system integration. Compliance with 21CFR 1040.10 and/or IEC 60825-1:2014 will need to be determined at the system level.

Lumentum has registered this laser with the FDA/CDRH as an OEM component. Please contact Lumentum for an FDA/CDRH accession number for this laser component.

## Labeling




Laser radiation safety warning  
Laser classification per IEC 60825-1:2014  
Maximum output power 2W per port



Box Label

Ordering Information

For more information on this or other products and their availability, please contact your local Lumentum account manager or Lumentum directly at [customer.service@lumentum.com](mailto:customer.service@lumentum.com).

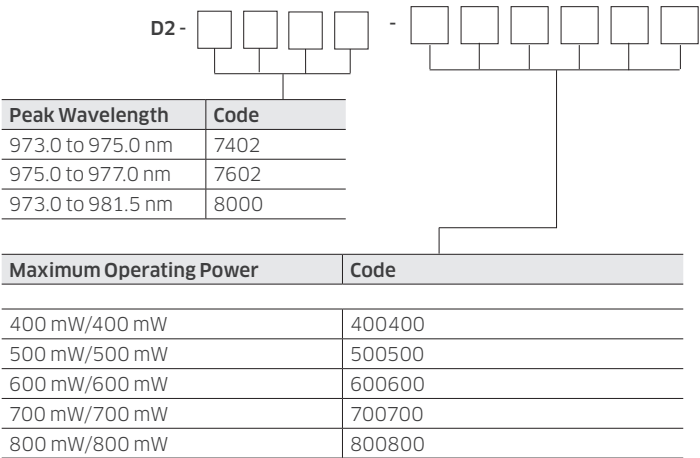

North America  
Toll Free: 844 810 LITE (5483)

Outside North America  
Toll Free: 800 000 LITE (5483)

China  
Toll Free: 400 120 LITE (5483)

© 2021 Lumentum Operations LLC  
Product specifications and descriptions in this document are subject to change without notice.