


WDM, Filter, 100 GHz, ITU Component

DWS Series

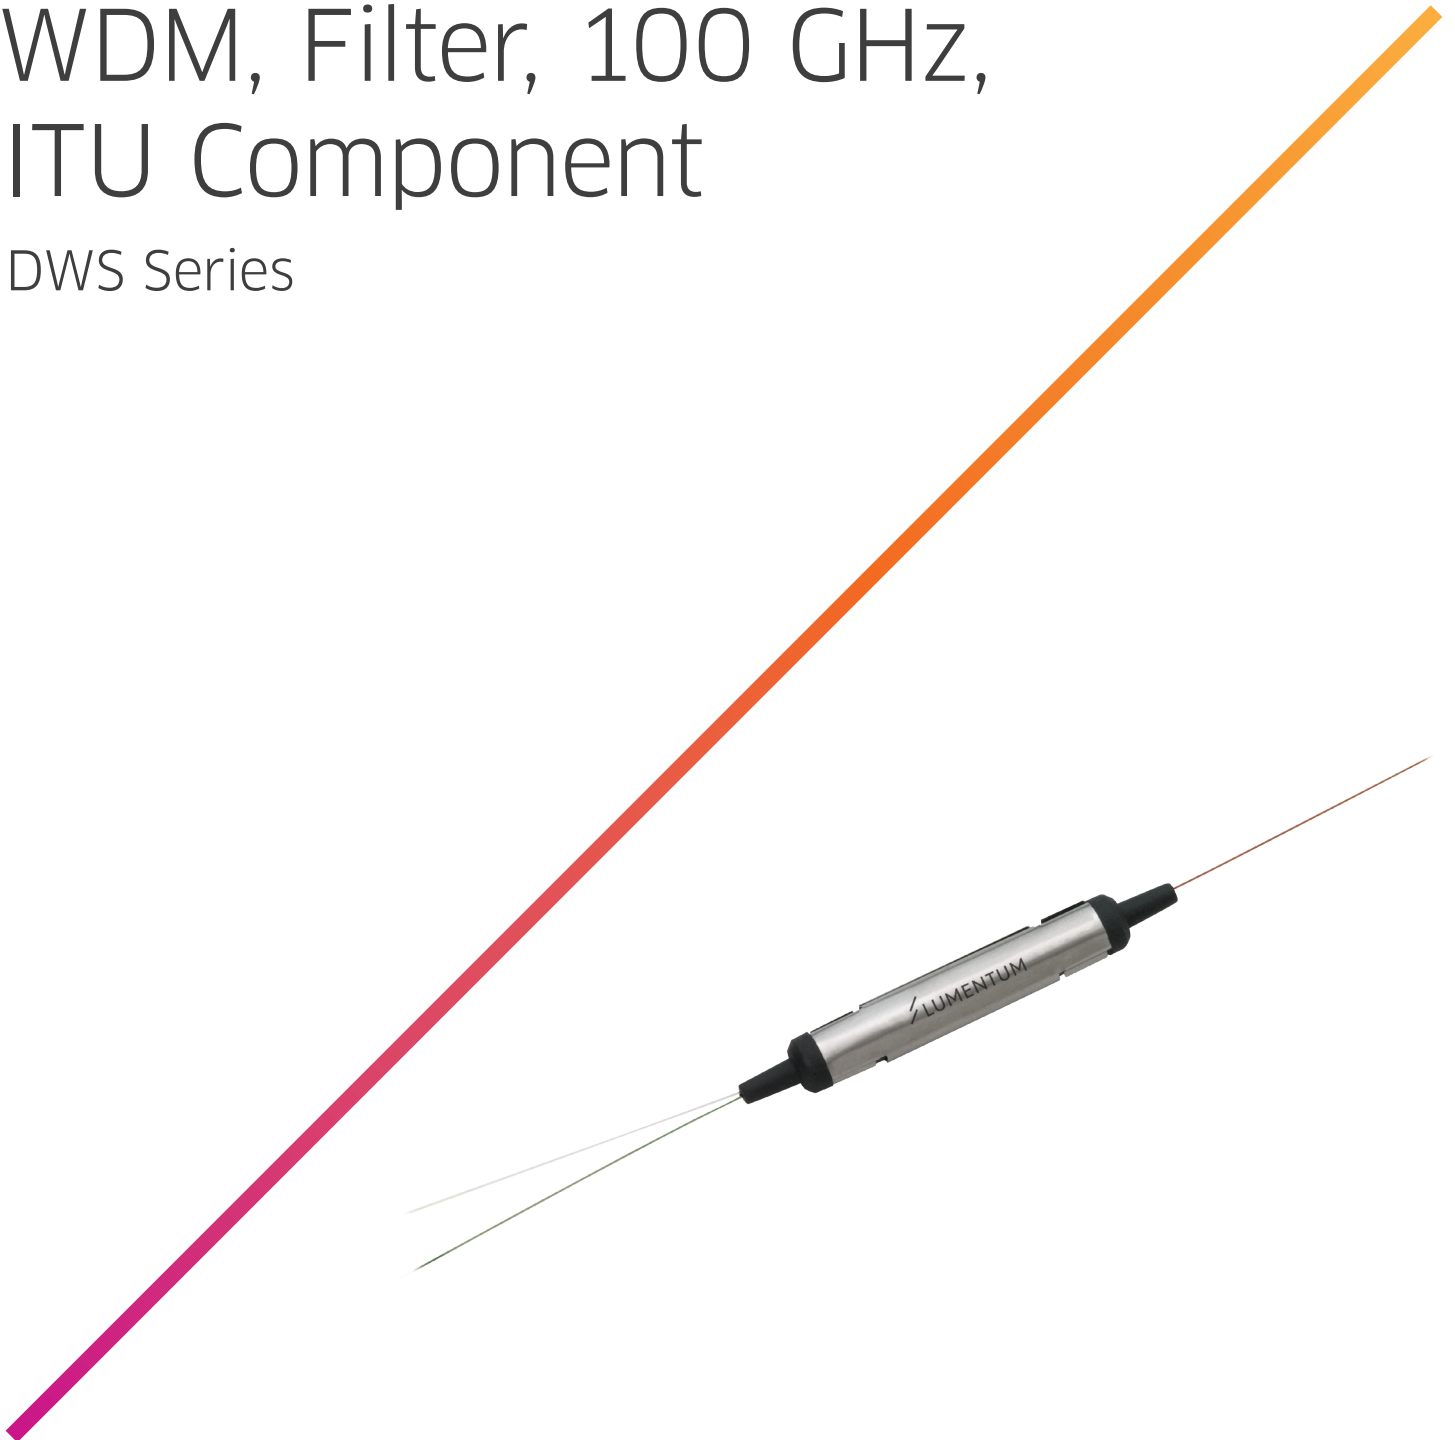

Lumentum ITU Components are the result of years of telecommunication experience in interference filter technology. Individual components are available on ITU channel spacings of 200 and 100 GHz, as well as on bands of ITU channels.

Manufactured using laser welding technology, these devices exceed the requirements of Telcordia GR-1221. They demonstrate low loss, temperature insensitivity, and reliable performance in any system application.

Used within mux/demux and add/drop applications, Lumentum ITU components provide the utmost flexibility in single ITU channel management. They offer a simple solution to wavelength routing and are optimized to supply maximum bandwidth and isolation, yet maintain low chromatic dispersion.

Established volume capability and proven experience in customizing fiberoptic components and modules make Lumentum the supplier of choice.

Key Features

- Low insertion loss
- Exceptional reliability and environmental stability
- Low polarization dependent loss
- Flat and wide passband
- High demux channel isolation

Applications

- Access/enterprise networks
- Metro networks
- Long haul networks
- Denser channel plans
- Test bench/systems

Compliance

- Telcordia GR-1221


Specifications

Parameter		Specification
Wavelength range		C- or L-band ITU channels 186.6 to 196.1 THz
Passband width	Minimum	± 12 GHz (± 0.10 nm)
Transmission passband ripple	Maximum	0.4 dB
Reflection passband ripple	Maximum	0.2 dB
Transmission insertion loss ¹	Maximum	1.1 dB
Reflection insertion loss ¹	Maximum	0.4 dB
Transmission isolation (adjacent channel)	Minimum	25 dB
Transmission isolation (non-adjacent channel)	Minimum	50 dB
Reflection isolation	Minimum	12 dB
Transmission chromatic dispersion	Maximum	46.4 ps/nm
Reflection chromatic dispersion	Maximum	17.5 ps/nm
Directivity	Minimum	45 dB
Return loss	Minimum	45 dB
Polarization dependent loss	Maximum	0.2 dB
Polarization mode dispersion	Maximum	0.2 ps
Optical power handling	Maximum	1 W
Operating temperature range		-5 to 75°C
Storage temperature range		-40 to 85°C
Fiber type		9/125/250 μ m fiber, 9/125/900 μ m fiber
Fiber length		1.5 \pm 0.1 m
Package dimensions (\varnothing x L)		
9/125/250 μ m fiber		5.5 x 35.4 mm (excluding strain reliefs)
9/125/900 μ m fiber		5.5 x 42.9 mm

1. Excludes connector insertion loss

Ordering Information

For more information on this or other products and their availability, please contact your local Lumentum account manager or Lumentum directly at customer.service@lumentum.com.



Channel Frequency
Provided by Lumentum upon customer confirmation

Code	Fiber Type
2	250 μm fiber (No connectors only)
9	900 μm fiber

Code	Connector Type ¹
0	No connectors
2	FC/SPC
3	FC/APC
4	SC/SPC
5	SC/APC
6	LC/UPC

1.Other connectors available upon request

Telcordia is a registered trademark of Telcordia Technologies Incorporated.



North America
Toll Free: 844 810 LITE (5483)

Outside North America
Toll Free: 800 000 LITE (5483)

China
Toll Free: 400 120 LITE (5483)

© 2015 Lumentum Operations LLC
Product specifications and descriptions in this document are subject to change without notice.